

FM-200® Component Description

Electric Control Head, Stackable Explosion Proof


F-93-8017



FEATURES

- For use with UL Listed, ULC Listed & FMRC Approved Systems

ELECTRIC CONTROL HEAD, PART NO. 486500-01 IS RATED FOR USE IN HAZARDOUS (CLASSIFIED) LOCATIONS CLASS I, DIV. I, GROUPS C, D AND CLASS II, DIV. II, GROUPS E, F, G BETWEEN -40F AND 140F. USE CONDUIT SEAL WITHIN 18 IN. (45cm) OF THIS DEVICE.

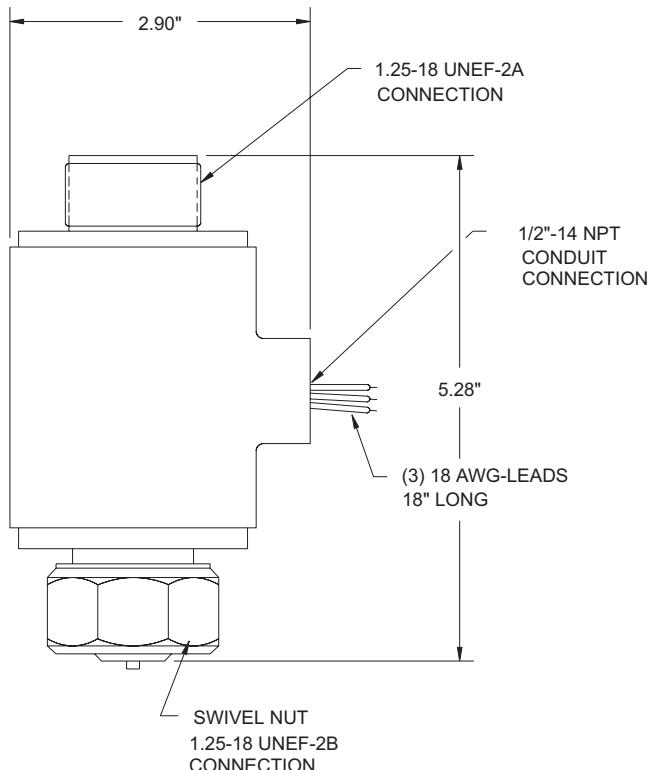

Note: This control head is polarized. Improper wiring will result in failure of this device to operate.

VOLTAGE:24 VDC
CURRENT:0.2A CONTINUOUS DRAW



Electric control head, P/N: 486500-01, is designed for installation directly on 487 Series Halon and Model 9300 fm-200 valves only. This control head must not be installed on any other type of halon or FM-200 cylinder valve, nitrogen valve, carbon dioxide cylinder valve, FE-13 cylinder valve or Stop (Directional) valve. Installation of this control head to any other device (e.g., pressure operated control head) will result in failure of device to operate.

P/N: 486500-01

FM-200 is a Registered Trademark of Great Lakes Chemical Corporation.

This literature is provided for informational purposes only. KIDDE-FENWAL, INC. assumes no responsibility for the product's suitability for a particular application. The product must be properly applied to work correctly. If you need more information on this product, or if you have a particular problem or question, contact KIDDE-FENWAL, INC., Ashland, MA 01721. Telephone: (508) 881-2000.

Fenwal Protection Systems
A UTC Fire & Security Company
400 Main Street
Ashland, MA 01721
Ph: 508.881.2000
Fax: 508.881.8920
www.fenwalfire.com