FM-200[®] Component Description


Pressure Trip



F-93-5200

FEATURES

For use with UL Listed, ULC Listed & FMRC Approved Systems

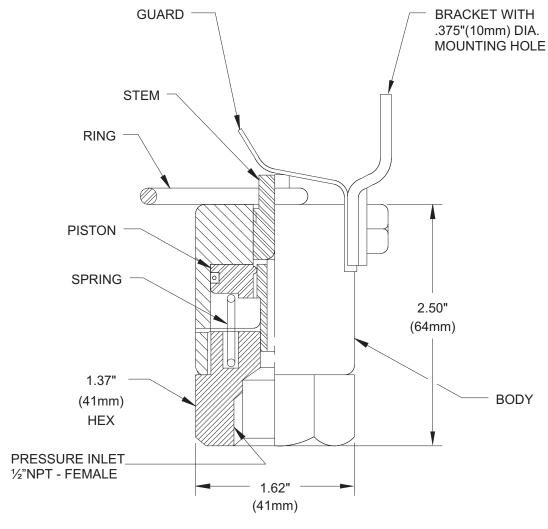

P/N: 81-874290-000

MATERIALS

BODY, BRACKET, AND PISTON: BRASS

GUARD, STEM, RING, AND SPRING: STAINLESS STEEL

MAXIMUM LOAD ON RING: 100 lbs. (45 Kg.) MINIMUM NOMINAL OPERATING PRESSURE: 50 PSI (3.5 Bar)

FM-200 is a Registered Trademark of Great Lakes Chemical Corporation.

This literature is provided for informational purposes only. KIDDE-FENWAL, INC. assumes no responsibility for the product's suitability for a particular application. The product must be properly applied to work correctly.

If you need more information on this product, or if you have a particular problem or question, contact KIDDE-FENWAL, INC., Ashland, MA 01721. Telephone: (508) 881-2000.

Fenwal Protection Systems A UTC Fire & Security Company 400 Main Street Ashland, MA 01721 Ph: 508.881.2000

Fax: 508.881.8920 www.fenwalfire.com