



PRN-6 Printer (IQ-318/IQ-636X-2/542R/542D)

General

The PRN-6 printer can be used with AUTOPULSE IQ-318 and IQ-636X-2 Control Panels, and with AUTOPULSE 542R and 542D Releasing Panels to provide a written record of system events and status changes.

Features

- Provides a hard copy printout of all system events and status changes.
- Time stamps printed on the record of each event and status change with the current time-of-day and date.
- ▶ • Uses standard 9 in. x 11 in. (229 mm x 279 mm) tractor-feed fan-fold paper.
- Provides 80 columns of data at 10 characters per inch.
- Provides printed records of system configuration and addressable device parameters.
- Nine-pin print head.
- Very quiet (approximately 53 dBA).

Applications

Printed transaction records reduce the man-hours required to install and maintain a system. A printed record of all system events (alarms, troubles, etc.) and status changes can be especially valuable in the event of a disputed incident.

Construction and Operation


The printer is housed in its own separate enclosure and is suitable for placement on a desk top, counter, or table.

Installation

The PRN-6 should be placed in a secure area to prevent theft of the printer and/or printed records.

The PRN-6 must not be located further than 50 ft (15.2 m) (actual cable length) from the control panel.

Consult the control panel installation manual for the proper method and PINs used to complete the electrical connection to the control panel.

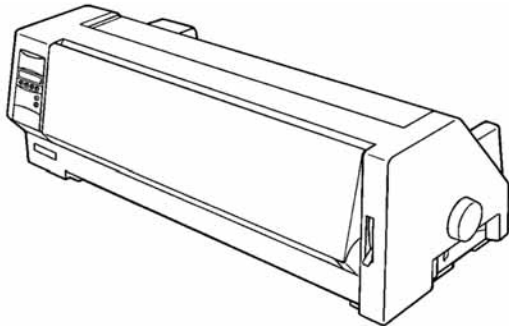

008585

Note: If printer operation is required during failure of primary power, use of a separate UL-listed Uninterruptable Power Supply (UPS) system is recommended.

Printer Specifications

Printer Method: Serial printing with 9-pin matrix print head

Printing Speed: (copy draft) 310 cps at 10 cpi

Character Density: 10 cpi standard (12, 15, 17.1, and 20 cpi available via front panel)

Graphic Resolution: (VxH) 144 x 240 dpi

Ribbon Life (approx.): 4 million characters (DPQ)

Acoustic Noise Level: 53 dBA (approx.)

- ▶ Dimensions: 19 in. (483 mm) W x 7.9 in. (201 mm) H x 9.7 in. (246 mm) D

Weight: 17.6 lb (7.9 kg)

Power Supply: 120 VAC (only)

Power Consumption: 50 watts (operating)

Operating Environment Temperature: 50 °F to 104 °F (10 °C to 40 °C)

Operating Environment Humidity: 20% to 80% (non-condensing)

Agency Listings and Approvals*

These listings and approvals apply to the modules specified in this document. In some cases, certain modules or applications may not be listed by certain approval agencies, or listing may be in process. Consult factory for latest listing status.

UL Listed	.S635
ULC Listed	.S635
MEA	.08-04-E
FM	.Approved
CSFM	.7300-0028:197

*Listings and Approvals are under NOTIFIER.

Ordering Information

PRN-6: 9-pin dot-matrix printer, 120 VAC power.

Part No.	Description	Shipping Weight lb (kg)
435469	PRN-6 Printer	18 (8.2)