

Fenwal Phoenix

Fan Nozzles 180° and 360°

Assembly 1/2-in., 3/4-in., 1-in., 1-1/4-in., 1-1/2-in, 2-in.

P/N: 93-1944XX-XXX



A UTC Fire & Security Company

F-93-107

FEATURES

- “Fan” Pattern Allows for a Faster Rate of Vaporization
- Unique Nozzle Interior Design Allows for Superior Flow Control
- 180° is Mounted 1-1/2 in. from Side Wall
- Brass or Stainless Steel
- Minimum Nozzle Pressure of 72 PSI (5 bar)
- Recess Option (Minimum of 1/2” from Ceiling)
- Custom Drilled to Fit Specific Applications
- UL Listed for Use with the Phoenix Only
- FM Approved for Use with the Phoenix Only
- Patented Fenwal Technology


DESCRIPTION

Fenwal Phoenix 180° and 360° Fan Nozzles are built with a flat discharge pattern, or a “fan” pattern, which allows for a faster rate of vaporization. The large area of coverage that is created by the nozzle’s “fan” action, allows the agent to discharge closer to the nozzle and vaporize quickly to create the proper mixture between the agent and the nitrogen.

The nozzles are designed with unique interior profile to provide a smooth transitional direction change for the agent upon discharge. This type of design allows the agent to keep much of its momentum as it leaves the nozzle—momentum is necessary to provide agent distribution at greater distance. The nozzles are custom drilled for each application, allowing the nozzles to be effective in large or small spaces.

Another design feature that the Phoenix nozzles offer is a downward discharge angle from the nozzle which controls the interaction of the vaporizing discharged liquid with ceiling surfaces, which is to be avoided.

When mounted, the nozzles offer a recess option with a minimum placement of 1/2 inch from the ceiling. The 180° nozzle can also be located 1-1/2 inches from the side wall. The nozzles have a sleek, discrete profile, for an aesthetically pleasing look.

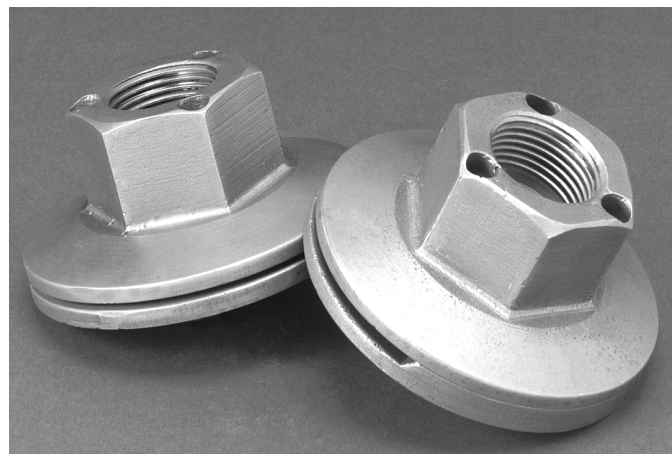

MAINTENANCE

1. Ensure that there are no obstructions to hinder distribution of FM-200 agent.
2. Visually inspect nozzles for physical damage or clogging. Replace or clean if required. If nozzles are replaced, new nozzles used must be the same part number in the same location.

SPECIFICATIONS

MATERIALS

Body: Brass or Stainless Steel

Approx. Weight 360° Nozzle:


1/2-in. and 3/4-in.:	1.3 lb. (0.59 kg)
1-in. through 2-in.:	4.5 lb. (2.00 kg)

Approx. Weight 180° Nozzle:

1/2-in. and 3/4-in.:	1.3 lb. (0.59 kg)
1-in. through 2-in.:	5.0 lb. (2.30 kg)

Note: Please refer to the Design, Installation, Operation and Maintenance Manual (P/N 93-FM200M-030) for associated nozzle part numbers and orifice areas.

DIMENSIONS

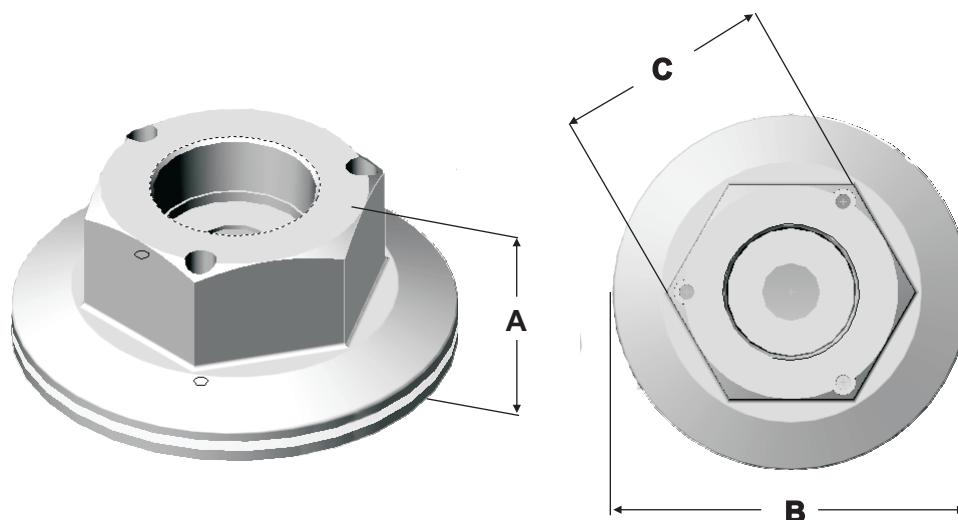

Nominal Size	180° Nozzle						360° Nozzle					
	A		B		C		A		B		C	
	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm
1/2"	1.47	37.00	3.00	76.00	1.50	38.00	1.44	36.50	3.00	76.00	1.50	38.00
3/4"	1.52	39.00	3.00	76.00	1.50	38.00	1.47	37.00	3.00	76.00	1.50	38.00
1"	1.98	50.00	5.00	127.00	3.00	76.00	1.92	49.00	5.00	127.00	3.00	76.00
1¼"	2.06	52.00	5.00	127.00	3.00	76.00	1.96	50.00	5.00	127.00	3.00	76.00
1½"	2.13	54.00	5.00	127.00	3.00	76.00	2.00	51.00	5.00	127.00	3.00	76.00
2"	2.29	58.00	5.00	127.00	3.00	76.00	2.08	53.00	5.00	127.00	3.00	76.00

ORDERING INFORMATION

Refer to the Fenwal Phoenix Manual (P/N 93-FM200M-030) for part number information.

This literature is provided for informational purposes only. KIDDE-FENWAL, INC. assumes no responsibility for the product's suitability for a particular application. The product must be properly applied to work correctly. If you need more information on this product, or if you have a particular problem or question, contact KIDDE-FENWAL, INC., Ashland, MA 01721. Telephone: (508) 881-2000.



A UTC Fire & Security Company

400 Main Street
Ashland, MA 01721
Ph: 508.881.2000
Fax: 508.881.8920
www.fenwalfire.com