

Fenwal Engineered Fire Suppression System

Designed for use with 3M™ Novec™ 1230 Fire Protection Fluid

Nitrogen Pilot Cylinder, Bracket, and Adapter Data Sheet



F-44-5050



A UTC Fire & Security Company

FEATURES

- For use with UL Listed, ULC Listed and FM Approved Systems

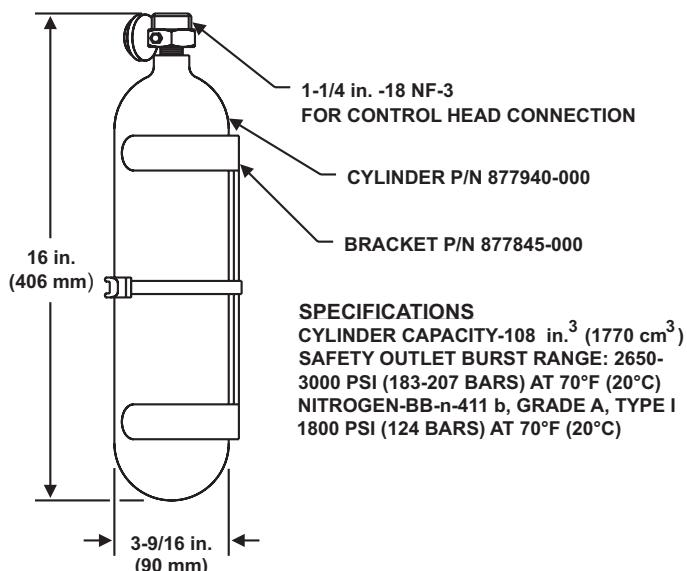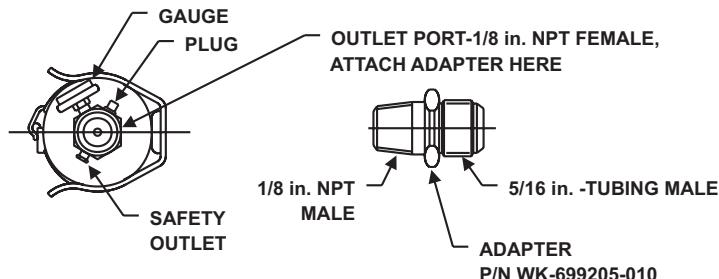

MATERIAL

- Cylinder: Steel, Painted Black
- Valve: Brass
- Bracket: Steel, Painted Black
- Adapter: Brass

SPECIFICATIONS

- Cylinder Capacity: 108 in.³ (1770 cc)
- Safety Outlet Burst Range: 2650 to 3000 PSI (183 to 207 bars) at 70°F (21°C)
- Nitrogen: NOTROGEN-BB-n-411b, Grade A, Type 1 1800 PSI (124 bars) at 70°F (21°C)

Fenwal is a registered trademark of Kidde-Fenwal, Inc.

3M and Novec are trademarks of 3M.

All other trademarks are property of their respective owners.

This literature is provided for informational purposes only. KIDDE-FENWAL, INC. assumes no responsibility for the product's suitability for a particular application. The product must be properly applied to work correctly.

If you need more information on this product, or if you have a particular problem or question, contact KIDDE-FENWAL, INC., Ashland, MA 01721. Telephone: (508) 881-2000.

Fenwal Protection Systems
A UTC Fire & Security Company
400 Main Street
Ashland, MA 01721
Ph: 508.881.2000
Fax: 508.881.8920
www.fenwalfire.com