

# Kidde ECS Fire Suppression System Component Description



Effective: June 2014


K-90-5070 Rev BA

## 1/4-Inch Flexible Actuation Hoses

### FEATURES

- For Use with UL, ULC and FM Approved Systems
- See Kidde® Manual 06-236225-001 for USCG Approval
- RoHS Compliant

P/N: WK-26498X-000

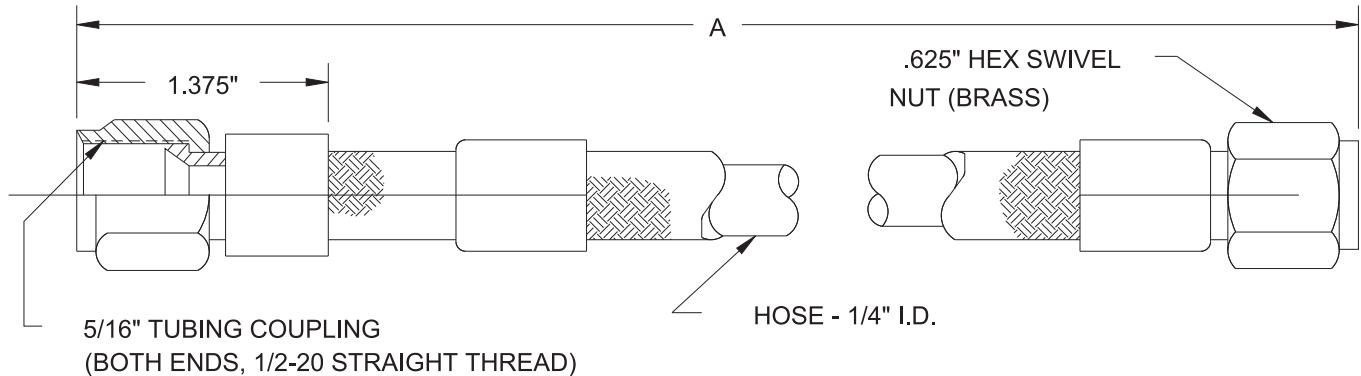

Part Number	A*
WK-264986-000	30
WK-264987-000	22

\* Dimensions are in inches.

### TECHNICAL DATA

- **Minimum Burst Pressure:** 12000 PSIG
- **Operating Pressure:** 3000 PSIG
- **Test Pressure:** 4500 PSIG
- **Minimum Bend Radius:** 2.5 Inches

### MATERIALS

- **Hose:** Wire Braided, Teflon® Lining (CRES T304)
- **Couplings:** Brass

### COMPATIBILITY

Series	For Use With
Kidde ECS HFC-227ea	X
Kidde ECS Advanced Delivery FM-200®	X

This literature is provided for informational purposes only. KIDDE-FENWAL, INC. assumes no responsibility for the product's suitability for a particular application. The product must be properly applied to work correctly. If you need more information on this product, or if you have a particular problem or question, contact KIDDE-FENWAL, Inc.

FM-200 is a registered trademark of E.I. du Pont de Nemours and Company. Kidde is a registered trademark of Kidde-Fenwal Inc. All other trademarks are the property of their respective owners.