

Kidde ECS Fire Suppression System Component Description



Effective: June 2014


K-90-5180

Pressure Operated Switch

FEATURES

- For Use with UL Listed, ULC Listed and FM Approved Systems
- See Kidde® Manual 06-236225-001 for USCG Approval

P/N: 81-486536-000

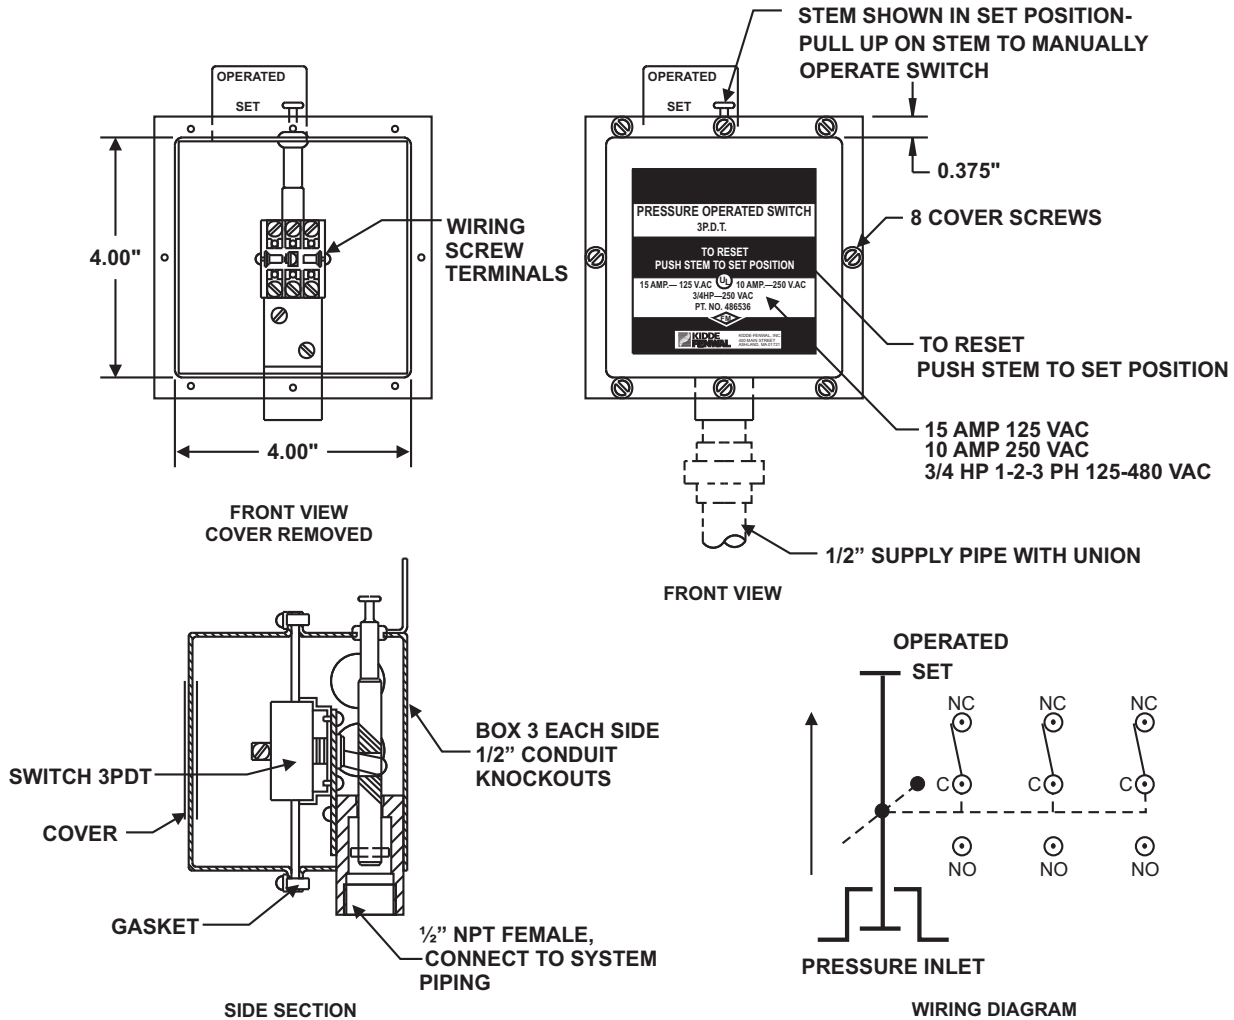

NOTES:

- The switch may be mounted in any position; however, the preferred installation is upright, as shown.
- Any load connection to the switch must not exceed the switch rating, and shall utilize a suitable protection device (i.e., circuit breaker, fuse).
- Contact Ratings (3 PDT):
 - 15 Amp @ 125 Vac
 - 10 Amp @ 250 Vac
 - 3/4 HP @ 250 Vac
 - 1, 2 or 3 Phase

COMPATIBILITY

Series	For Use With
Kidde ECS HFC-227ea	X
Kidde ECS Advanced Delivery FM-200®	X

FM-200 is a registered trademark of E.I. du Pont de Nemours and Company. Kidde is a registered trademark of Kidde-Fenwal Inc. All other trademarks are the property of their respective owners.

This literature is provided for informational purposes only. KIDDE-FENWAL, INC. assumes no responsibility for the product's suitability for a particular application. The product must be properly applied to work correctly. If you need more information on this product, or if you have a particular problem or question, contact Kidde-Fenwal Inc.

