

Kidde ECS Fire Suppression System Component Description



Effective: June 2014


K-90-5200 Rev BA

Pressure Trip

FEATURES

- For Use with UL Listed, ULC Listed and FM Approved Systems
- See Kidde® Manual 06-236225-001 for USCG Approval
- RoHS Compliant

P/N: 81-874290-000

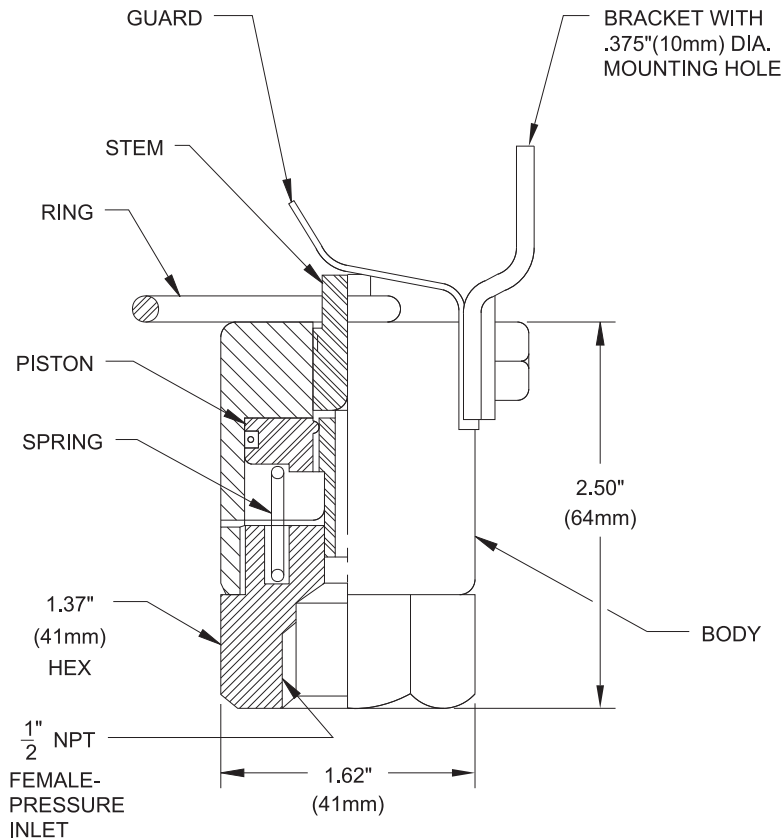

TECHNICAL DATA

- **Maximum Load on Ring:** 100 lb. (45 kg)
- **Minimum Nominal Operating Pressure:** 50 PSI (3.5 bar)

MATERIALS

- **Body, Bracket and Piston:** Brass
- **Guard, Stem, Ring and Spring:** Stainless Steel

COMPATIBILITY

Series	For Use With
Kidde ECS HFC-227ea	X
Kidde ECS Advanced Delivery FM-200®	X

This literature is provided for informational purposes only. KIDDE-FENWAL, INC. assumes no responsibility for the product's suitability for a particular application. The product must be properly applied to work correctly. If you need more information on this product, or if you have a particular problem or question, contact KIDDE-FENWAL Inc.

FM-200 is a registered trademark of E.I. du Pont de Nemours and Company. Kidde is a registered trademark of Kidde-Fenwal Inc. All other trademarks are the property of their respective owners.