
## HI-FOG®

## Technical Data Sheet TD8162 A

## **Non-return Valves RHD**




Stock codes D301xx (x: see table below)

TA

1 Aug 2007

Stock code	Valve type	A [mm]	B [mm]	AF [mm]	O.D. [mm]	Mass [kg]
D30110	RHD 12S	42,3	~72	24	12,0	0,22
D30115	RHD 16S	51,0	~88	30	16,0	0,43
D30135	RHD 25S	59,0	~109	46	25,0	1,16
D30140	RHD 30S	70,0	~131	50	30,0	1,66
D30145	RHD 38S	66,9	~130	60	38,0	2,00
D30145.1	RHD 38S AISI316	66,9	~130	60	38,0	2,05

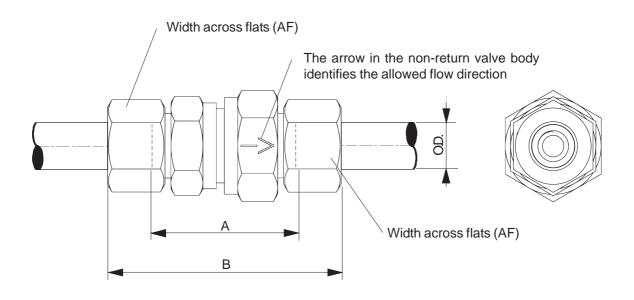

## **Description:**

The non-return valve is used to control the fluid flow direction in piping.

General	Body material	Stainless steel	
	Connections	Cutting ring DIN2353	
	Max. working pressure	200 bar	
	Opening pressure	1,5 bar (std spring)	