

# Kidde ECS 500 psi with FK-5-1-12 Fire Protection Fluid



Cylinder and Valve Assemblies, 10 lb. to 70 lb. Capacity,  
Vertical Mount Only Data Sheet


Effective: January 2018  
K-45-0501 Rev AA

## FEATURES

- UL Listed, ULC Listed, and FM Approved for use with Kidde ECS 500 psi Systems.

P/N: 45-5500X0-001

## ORDER INFORMATION

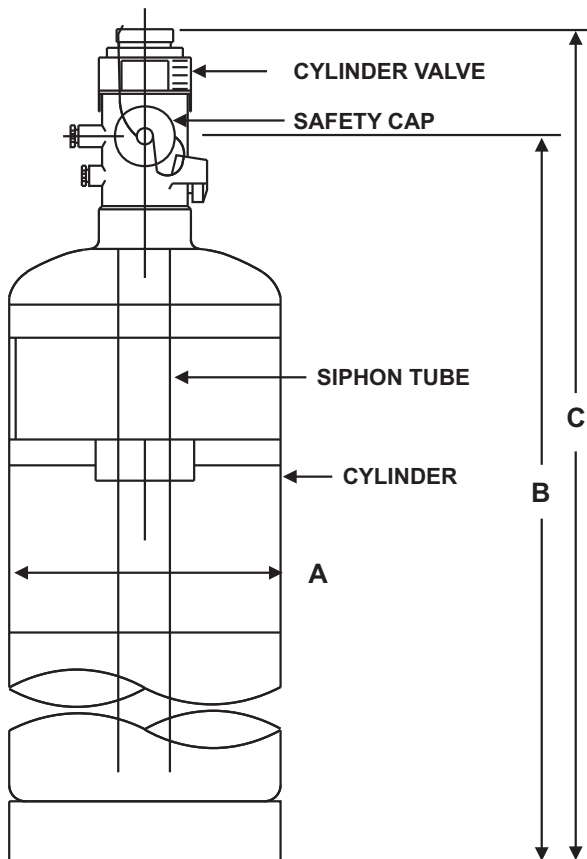

Part Number	Cylinder Size	Dimensions		
		A	B	C
45-550010-001	10 lb.	7.07 in.	13.34 in.	17.38 in.
45-550020-001	20 lb.	7.07 in.	21.01 in.	25.06 in.
45-550040-001	40 lb.	9 in.	22.80 in.	28.85 in.
45-550070-001	70 lb.	9 in.	34.87 in.	38.75 in.

## MATERIALS

Valve Body: Brass  
Cylinder: Steel, Painted Red

## Notes:

1. The safety cap must be installed on the valve outlet at all times, except when the cylinders are connected to the system piping, or being filled. The safety cap must not be removed from its chain.
2. See K-45-0513 for additional information.
3. Cylinders are vertical mount only.

## EXPORT INFORMATION (USA)

Jurisdiction: EAR  
Classification: EAR99

This document contains technical data subject to the EAR.

All trademarks are the property of their respective owners.  
©2018 Kidde-Fenwal, Inc.

This literature is provided for informational purposes only. KIDDE-FENWAL, INC. believes this data to be accurate, but it is published and presented without any guarantee or warranty whatsoever. KIDDE-FENWAL, INC. assumes no responsibility for the product's suitability for a particular application. The fire suppression system design, installation, maintenance, service and troubleshooting must be performed by trained, authorized Kidde Fire Systems distributors for the product to work correctly. If you need more information on this product, or if you have a particular problem or question, contact KIDDE-FENWAL, INC., Ashland, MA 01721 USA. Telephone: (508) 881-2000.

Kidde Fire Systems  
400 Main Street  
Ashland, MA 01721  
Ph: 508.881.2000  
Fax: 508.881.8920  
[www.kiddefiresystems.com](http://www.kiddefiresystems.com)