


Cylinder Wall Brackets Data Sheet

FEATURES

- UL Listed, ULC Listed, and FM Approved for use with systems listed in the Table , “COMPATIBILITY,” on page 2

Wall brackets (P/N 82-486485-000, 82-486486-000, 82-486487-000 and 82-486488-000) are available for the 10, 20, 40 and 70 lb (5, 8, 16, and 28 liter) size cylinders.

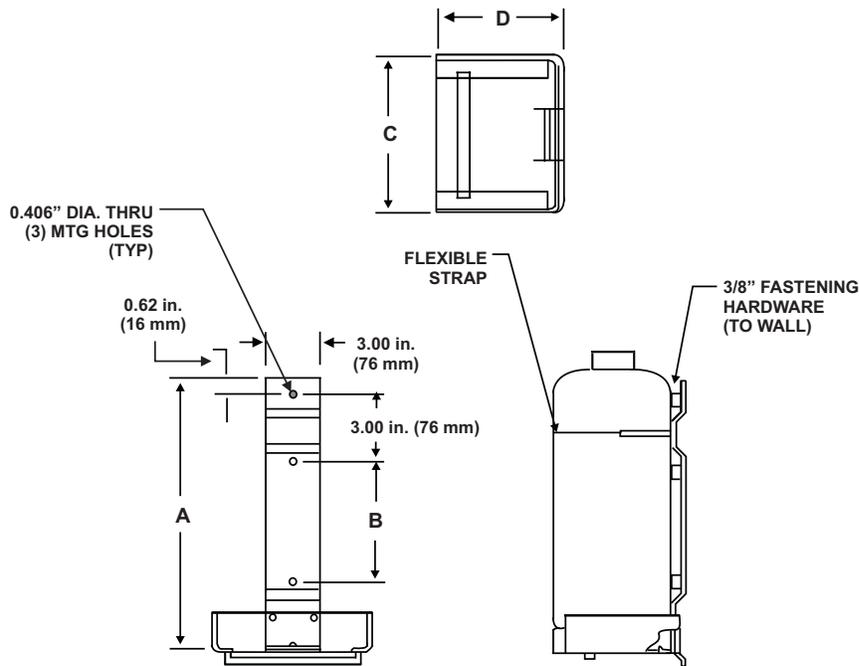

Part Number	Cylinder Cap	Dimension A	Dimension B	Dimension C	Dimension D
82-486485-000	10 lb.	8.62 in. (219 mm)	1.56 in. (40 mm)	7.68 in. (195 mm)	5.75 in. (146 mm)
82-486486-000	20 lb.	14.37 in. (365 mm)	7.31 in. (186 mm)	7.68 in. (195 mm)	5.75 in. (146 mm)
82-486487-000	40 lb.	13.12 in. (333 mm)	5.94 in. (151 mm)	9.75 in. (248 mm)	6.75 in. (172 mm)
82-486488-000	70 lb.	19.62 in. (498 mm)	12.44 in. (316 mm)	9.75 in. (248 mm)	6.75 in. (172 mm)

MATERIALS

- Steel, Painted Black SAE 1010

COMPATIBILITY

Series	DIOM P/N
Kidde ECS 500 psi with FK-5-1-12 Agent	06-237585-001
Kidde ECS with 3M™ Novec™ 1230 Fire Protection Fluid	06-236553-001
Kidde ECS with HFC-227ea Agent	06-236115-001
Kidde Modular ECS with HFC-227ea Agent	06-236116-001
Kidde ECS Marine with HFC-227ea Agent	06-236225-001

EXPORT INFORMATION (USA)

Jurisdiction: EAR

Classification: EAR99

This document contains technical data subject to the EAR.

All trademarks are the property of their respective owners.

This literature is provided for informational purposes only. KIDDE-FENWAL, INC. believes this data to be accurate, but it is published and presented without any guarantee or warranty whatsoever. KIDDE-FENWAL, INC. assumes no responsibility for the product's suitability for a particular application. The fire suppression system design, installation, maintenance, service and troubleshooting must be performed by trained, authorized Kidde Fire Systems distributors for the product to work correctly. If you need more information on this product, or if you have a particular problem or question, contact: KIDDE-FENWAL, INC., Ashland, MA 01721 USA, Telephone: (508) 881-2000.

