


1/4 in. Flexible Actuation Hoses Data Sheet

FEATURES

- UL Listed, ULC Listed, and FM Approved for use with the systems listed in the Table , "COMPATIBILITY," on page 2.

P/N: WK-26498X-000

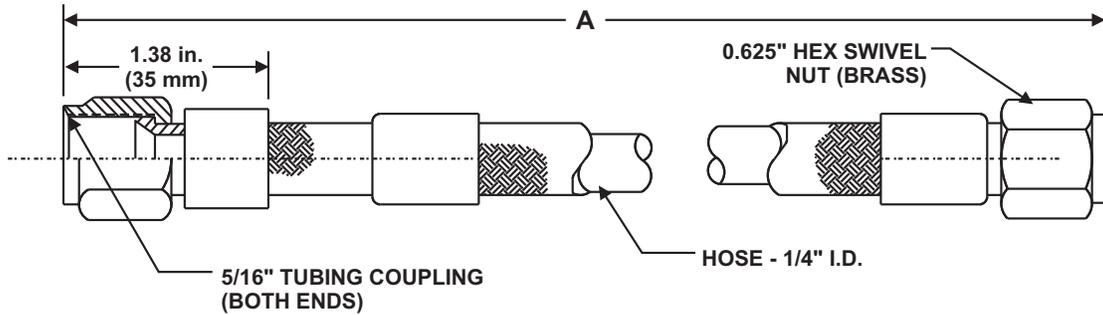

Part Number	Dimension A
WK-264986-000	30 in. (762 mm)
WK-264987-000	22 in. (559 mm)

TECHNICAL DATA

Minimum Burst Pressure: 12000 PSIG
 Operating Pressure: 3000 PSIG
 Test Pressure: 4500 PSIG
 Minimum Bend Radius: 2-1/2 in.

MATERIALS

Hose: Wire Braided, Teflon® Lining (CRES T304)
 Couplings: Brass

COMPATIBILITY

Series	DIOM P/N
Kidde ECS 500 psi with FK-5-1-12 Agent	06-237585-001
Kidde ECS with 3M™ Novec™ 1230 Fire Protection Fluid	06-236553-001
Kidde ADS with 3M™ Novec™ 1230 Fire Protection Fluid	06-237256-001
Kidde ADS Marine with 3M™ Novec™ 1230 Fire Protection Fluid	06-237257-001
Kidde Marine with 3M™ Novec™ 1230 Fire Protection Fluid	06-236559-001
Kidde ECS with HFC-227ea Agent	06-236115-001
Kidde Modular ECS with HFC-227ea Agent	06-236116-001
Kidde ECS Marine with HFC-227ea Agent	06-236225-001
Kidde ADS with HFC-227ea Agent	06-236068-001
Kidde ADS Marine with HFC-227ea Agent	06-236595-001
Kidde FE-13™ Engineered Suppression System	06-236169-002
Kidde FE-13™ Modular Engineered Suppression System	06-236193-001
Kidde ECS Marine with 3M™ Novec™ 1230 Fire Protection Fluid	06-236559-001
Kidde Fire Systems Marine Carbon Dioxide Version 2.4 DIOM	220610
Kidde High Pressure CO ₂	81-CO2MAN-001
Kidde 3M™ Novec™ 1230 (for UTC India Specifications)	06-237127-600
Kidde ECS with FM-200™ (for UTC India Specifications)	06-237298-001

EXPORT INFORMATION (USA)

Jurisdiction: EAR
Classification: EAR99

This document contains technical data subject to the EAR.

All trademarks are the property of their respective owners.

This literature is provided for informational purposes only. KIDDE-FENWAL, INC. believes this data to be accurate, but it is published and presented without any guarantee or warranty whatsoever. KIDDE-FENWAL, INC. assumes no responsibility for the product's suitability for a particular application. The fire suppression system design, installation, maintenance, service and troubleshooting must be performed by trained, authorized Kidde Fire Systems distributors for the product to work correctly. If you need more information on this product, or if you have a particular problem or question, contact: KIDDE-FENWAL, INC., Ashland, MA 01721 USA, Telephone: (508) 881-2000.

