# **Component Description**




# **Pressure Operated Switch Data Sheet**

Effective: January 2018 K-85-0524 Rev AA

#### **FEATURES**

UL Listed, ULC Listed, and FM Approved for use with the systems listed in the Table, "COMPATIBILITY," on page 2.

### P/N: 81-486536-000

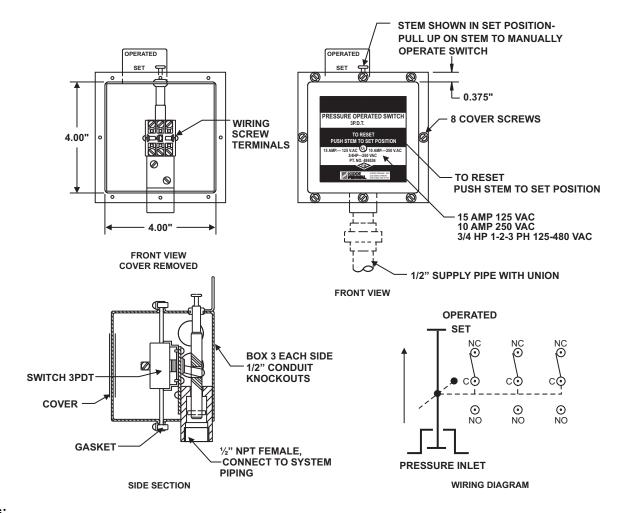

## Notes:

- The switch may be mounted in any position, however, the preferred installation is upright, as shown.
- Any load connection to the switch must not exceed the switch rating, and shall utilize a suitable protection device (i.e., circuit breaker, fuse)
- Contact Ratings (3 PDT)
  - 15 Amp @ 125 Vac
  - 10 Amp @ 250 Vac
  - 3/4 HP @ 250 Vac
  - 1, 2, or 3 Phase

## **COMPATIBILITY**

Series	DIOM P/N
Kidde ECS 500 psi with FK-5-1-12 Agent	06-237585-001
Kidde ECS with 3M™ Novec™ 1230 Fire Protection Fluid	06-236553-001
Kidde ADS with 3M™ Novec™ 1230 Fire Protection Fluid	06-237256-001
Kidde Marine with 3M™ Novec™ 1230 Fire Protection Fluid	06-236559-001
Kidde ADS Marine with 3M™ Novec™ 1230 Fire Protection Fluid	06-237257-001
Kidde ECS with HFC-227ea Agent	06-236115-001
Kidde Modular ECS with HFC-227ea Agent	06-236116-001
Kidde ECS Marine with HFC-227ea Agent	06-236225-001
Kidde ADS Marine with HFC-227ea Agent	06-236595-001
Kidde ADS with HFC-227ea Agent	06-236068-001
Kidde High Pressure CO <sub>2</sub>	81-CO2MAN-001
Kidde Fire Systems Marine Carbon Dioxide Version 2.4 DIOM	220610
Kidde 3M™Novec™ 1230 (for UTC India Specifications)	06-237127-600
Kidde ECS with FM-200™ (for UTC India Specifications)	06-237298-001

#### **EXPORT INFORMATION (USA)**

Jurisdiction: EAR Classification: EAR99 This document contains technical data subject to the EAR.

All trademarks are the property of their respective owners.

This literature is provided for informational purposes only. KIDDE-FENWAL, INC. believes this data to be accurate, but it is published and presented without any guarantee or warranty whatsoever. KIDDE-FENWAL, INC. assumes no responsibility for the product's suitability for a particular application. The fire suppression system design, installation, maintenance, service and troubleshooting must be performed by trained, authorized Kidde Fire Systems distributors for the product to work correctly. If you need more information on this product, or if you have a particular problem or question, contact: KIDDE-FENWAL, INC., Ashland, MA 01721 USA, Telephone: (508) 881-2000.

